# Precision in Temperature




# PCM-21B

| PCM Description          | Mineral Base  |         |
|--------------------------|---------------|---------|
| Specific Gravity @ 18 °C | 1.175 — 1.190 |         |
| Heat of Fusion           | min 220       | kJ / kg |
| Melting Temperature      | -24 — -21     | °C      |

## Thermal Properties Three Layer Calorimeter (3LC)

| Peak Melting Temperature                 | -21 (-6) | °C (°F) |
|--|----------|---------|
| Total Heat Capacity,<br>Melting*         | 308      | kJ / kg |
| Peak Crystallization<br>Temperature      | -23 (-9) | °C (°F) |
| Total Heat Capacity,<br>Crystallization* | 308      | kJ / kg |

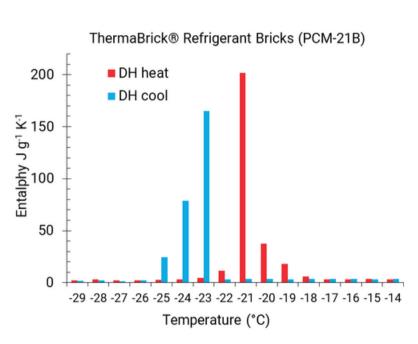

TEMPRECISION

INTERNATIONAL

\*Total heat capacity includes both latent heat and sensible heat.

### Handling and Storage:

- ThermaBrick® Refrigerant Bricks must remain tightly closed. Store at a temperature between 5 30 °C (41 86 °F).
- Store in accordance with local regulations. Store in the original container protected from direct sunlight in a dry, cool, and well-ventilated
  area, away from incompatible materials and food and drink. Do not store in unlabeled containers. Reference the Safety Data Sheet for
  additional information on Storage and Handling.
- This product contains no ingredients classified as hazardous.
- Intended use: Safe transport of blood, therapeutic drugs, vaccines, chemicals, gourmet foods, and mail-order meal kits.
- Do not puncture, tear, or rupture. Temprecision International considers this product an article. The article is not intended to be removed from the packaging. Misuse of this article may result in exposure to hazardous chemicals.

#### **Disclaimer:**

- Product information provided is designed to be used as a planning aid and is nonbinding. Subject to technical changes without notice.
- The preceding data is based on tests and experience, which Temprecision International believes reliable and is supplied for informational purposes only. Temprecision International expressly disclaims any liability whatsoever for damage or injury that results from the use of the preceding data, and nothing contained therein shall constitute a guarantee, warranty, or representation (including freedom from patent liability) by Temprecision International with respect to the data, the product described, or its fitness for use for any specific purpose, even if that purpose is known to Temprecision International. For detailed safety and handling information regarding these products, please refer to the respective Temprecision International Safety Data Sheet.

Rev 3; 01.25